

Coil Lifters & Upenders



Model 82NC - Narrow Coil C-Hook




PRODUCT FEATURES:

- Handles narrow coils with less coil edge damage.
- More durable than web slings.
- Lightweight for easier handling.
- Built in guide handle for ease of coil positioning.
- Available with optional curved coil saddle.
- Inside radius on hooks avoid coil edge contact.
- Complies with ASME standards.



*Will not hang level when empty.

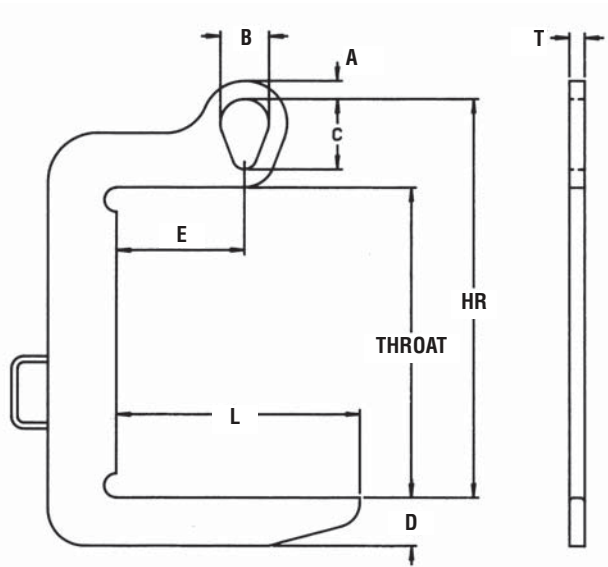

NOTE: E dimension equals one-half the dimension of L + 1/2".


SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)										Weight (lbs.)
		Coil Width Max.	Throat	Lifting Arm Plate		HR Headroom	Bail Dimensions					
				Length L	Depth D		A	B	C	T		
82NC-1/2-8	1/2	8	14-1/2	8	2-1/4	18-1/2	13/16	2	3-1/4	1/2	14	
82NC-1/2-12		12	14-1/2	12	2-5/8	18-1/2	13/16	2	3-1/4	1/2	17	
82NC-1-8	1	8	17-1/2	8	2	21-1/2	13/16	2	3-1/4	1/2	15	
82NC-1-16		16	17-1/2	16	2-1/2	21-1/2	13/16	2	3-1/4	1/2	20	
82NC-2-8	2	8	19-1/2	8	2-1/8	24-9/16	1	2-9/16	4-1/16	3/4	22	
82NC-2-16		16	19-1/2	16	3	24-9/16	1	2-9/16	4-1/16	3/4	40	
82NC-3 1/2-12	3-1/2	12	21-1/2	12	2-7/8	28-1/8	1-3/16	3-5/8	5-5/16	1	50	
82NC-3 1/2-16		16	21-1/2	16	3-3/8	28-1/8	1-3/16	3-5/8	5-5/16	1	63	
82NC-5-16	5	16	25-1/2	16	3-1/2	32-13/16	1-1/2	4	5-13/16	1-1/4	94	
82NC-5-20		20	25-1/2	20	4	32-13/16	1-1/2	4	5-13/16	1-1/4	110	

Coil Lifters & Upenders




Model 80H - Dixon Coil Hook with Pivoting Wedge

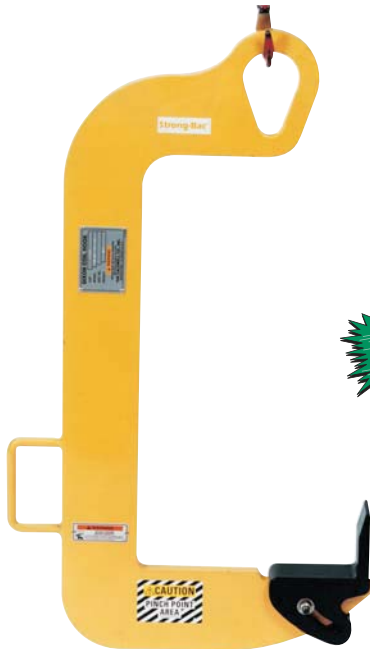

IN-STOCK PROGRAM

PRODUCT FEATURES:

- Easy horizontal to vertical upending of coils.
- Pivoting wedge for easy tilting of stacked coils.
- Wedge acts as retainer.
- Efficient and easy to use.
- Popular for use with small, lightweight coils.
- For use where overhead clearance is limited.
- Specially designed heat treated pivoting wedge.
- Complies with ASME standards.

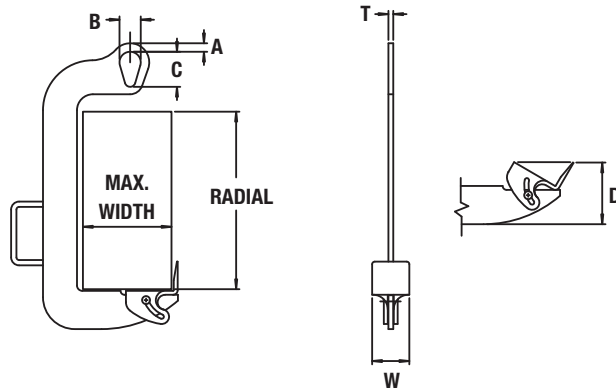

SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)									Weight (lbs.)
		Max. Width	Max. Radial	Min. I.D.	A	B	C	D	T	W	
80H-1/2-6/13	1/2	6	13	9	13/16	2	3-5/16	6	1/2	3-1/2	20
80H-1/2-12/13	1/2	12	13	13	13/16	2	3-5/16	6	1/2	3-1/2	28
80H-1-8/16	1	8	16	10	13/16	2	3-5/16	6	1/2	3-1/2	23
80H-2-10/18	2	10	18	12-1/2	1	2-5/8	4	6-3/4	3/4	2	42
80H-3.5-12/20	3-1/2	12	20	14-1/2	1-3/16	3-5/8	5-5/16	7-3/4	1	2-1/2	80

Other sizes available, consult factory.

EASY HORIZONTAL TO VERTICAL MOVEMENT. DO NOT USE FOR VERTICAL TO HORIZONTAL MOVEMENT.



Placing spacer blocks between stacked coils permits easy insertion of the wedge. Lightweight and pivoting wedge makes it easy to position the hook.



With the hook in place, the wedge pivots as the lift is started, and the coil begins to turn to a vertical position for transporting.



Coil is in vertical position after being lifted from its pallet. The weight of the coil holds the pivoting wedge in the vertical position during transportation.



Coil being loaded on a stock reel. Hook is easily removed from the coil after releasing the hoist.

Coil Lifters and Upenders




Model 82 - Heavy Duty C-Hook



PRODUCT FEATURES:

- Designed for heavy duty applications.
- High tensile alloy steel plate reduces physical size and weight.
- Counter balanced to hang level when empty.
- Inside radius on hooks avoid coil edge contact.
- Curved coil saddle is standard.
- Guide handles for ease of hook positioning.
- Handles a wide range of coil widths.
- Available with optional padding for additional coil protection.
- Complies with ASME standards.

WARNING
Center of the hoist and bail must be in-line with the load's center of gravity.

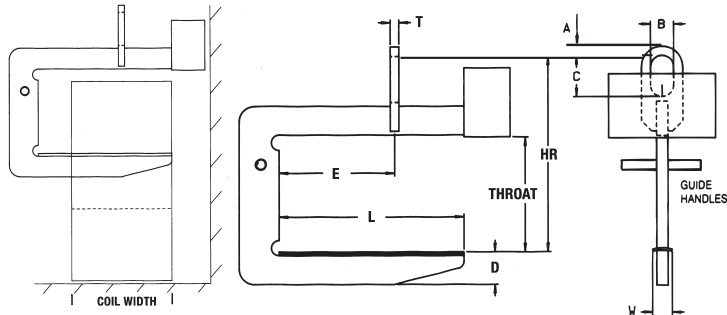

NOTE: E dimension is always one-half of maximum coil width.

SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions				
		Max.	Min.		Length L	Depth D	Width W		Opening		Thk. T		
82-5-36	5	36	24	24	30	5-5/16	4	37-3/8	1-1/2	4	7	1-1/4	420
82-5-48		48	30	24	39	6-1/8	4	38	1-1/2	4	7	1-1/4	584
82-5-60		60	36	24	48	6-9/16	4	38-1/2	1-1/2	4	7	1-1/4	680
82-7 1/2-36	7-1/2	36	24	24	30	5-5/8	4	37-1/2	1-1/2	4	7	1-1/2	615
82-7 1/2-48		48	30	24	39	6-5/16	4	38-1/4	1-1/2	4	7	1-1/2	774
82-7 1/2-60		60	36	24	48	6-5/16	4	39	1-1/2	4	7	1-1/2	942
82-10-48	10	48	30	24	39	7-1/4	4	41-1/4	2	5	9	1-3/4	928
82-10-60		60	36	24	48	7-1/2	4	41-3/8	2	5	9	1-3/4	1295
82-10-72		72	42	24	57	7-1/4	4	42-1/2	2	5	9	1-3/4	1616
82-15-48	15	48	30	30	39	7-1/4	4	47-7/8	2	5	9	1-3/4	1450
82-15-60		60	36	30	48	8	4	48	2	5	9	1-3/4	1824
82-15-72		72	42	30	57	8-3/4	4	48-3/4	2	5	9	1-3/4	2227
82-20-60	20	60	36	30	48	9-1/8	4	52-1/8	2-1/4	6	12	2	2175
82-20-72		72	42	30	57	10	4	52-5/16	2-1/4	6	12	2	2625
82-25-60	25	60	36	34	48	9	4	57-3/4	2-1/2	6	14	2-1/4	2820
82-25-72		72	42	34	57	9-3/4	4	58-1/2	2-1/2	6	14	2-1/4	3570
82-30-60	30	60	36	34	48	9-7/8	4	58-3/4	2-3/4	6	14	2-1/2	3180
82-30-72		72	42	34	57	10-5/8	4	59-3/8	2-3/4	6	14	2-1/2	3800
82-40-72	40	72	42	38	57	11	5	68	3-1/4	7	18	3	5350
82-50-84	50	84	48	40	64-1/2	13	6	71-7/8	3-3/4	7	18	3	7470

Other sizes available, consult factory.

Coil Lifters and Upenders



Model 82RC - Close Stacking C-Hook




PRODUCT FEATURES:

- Recessed counterweight allows for close stacking of coils which maximizes floor space.
- Handles a wide range of coil widths.
- Designed for heavy duty application.
- High tensile alloy steel plate reduces physical size and weight.
- Counter balanced to hang level when empty.
- Inside radius on hooks avoid coil edge contact.
- Curved coil saddle is standard.
- Guide handle for ease of hook positioning.
- Available with optional padding for additional coil protection.
- Complies with ASME standards.

WARNING

Center of the hoist and bail must be in-line with the load's center of gravity.

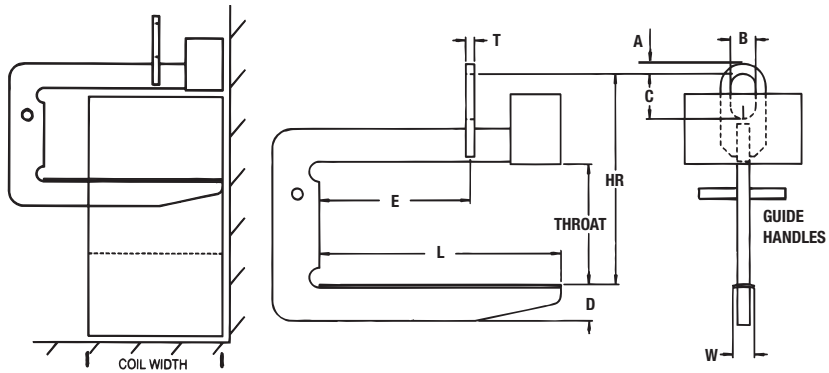

NOTE: E dimension is one-half of maximum coil width.

SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)											Weight (lbs.)
		Coil Width		Throat	Lifting Arm			HR Headroom	Bail Dimensions				
		Max.	Min.		Length L	Depth D	Width W		Opening			Thk. T	
82RC-5-36	5	36	24	24	30	5-5/16	4	37-1/4	1-1/2	4	7	1-1/4	550
82RC-5-48		48	30	24	39	6-1/8	4	38-1/16	1-1/2	4	7	1-1/4	707
82RC-5-60		60	36	24	48	6-15/16	4	38-15/16	1-1/2	4	7	1-1/4	853
82RC-7 1/2-36	7-1/2	36	24	24	30	5-5/8	4	37-1/2	1-1/2	4	7	1-1/2	750
82RC-7 1/2-48		48	30	24	39	6-3/8	4	38-1/4	1-1/2	4	7	1-1/2	996
82RC-7 1/2-60		60	36	24	48	6-15/16	4	39	1-1/2	4	7	1-1/2	1161
82RC-10-48	10	48	30	24	39	7-3/16	4	41-1/4	2	5	9	1-3/4	1200
82RC-10-60		60	36	24	48	7-5/8	4	41-1/2	2	5	9	1-3/4	1645
82RC-10-72		72	42	24	57	7-1/4	4	41-1/8	2	5	9	1-3/4	2100
82RC-15-48	15	48	30	30	39	7-1/4	4	47-7/8	2	5	9	1-3/4	2054
82RC-15-60		60	36	30	48	8	4	48	2-1/4	5	9	1-3/4	2410
82RC-15-72		72	42	30	57	8-3/4	4	48-3/4	2	5	9	1-3/4	2814
82RC-20-60	20	60	36	30	48	9-1/8	4	52-1/8	2-1/4	6	12	2	2864
82RC-20-72		72	42	30	57	9-3/4	4	52-1/2	2-1/4	6	12	2	2951
82RC-25-60	25	60	36	34	48	9	4	57-3/4	2-1/2	6	14	2-1/4	3077
82RC-25-72		72	42	34	57	9-3/4	4	58-3/4	2-1/2	6	14	2-1/4	3570
82RC-30-60	30	60	36	34	48	9-7/8	4	58-3/4	2-3/4	6	14	2-1/2	3480
82RC-30-72		72	42	34	57	10-5/8	4	59-3/8	2-3/4	6	14	2-1/2	4260
82RC-40-72	40	72	42	38	57	11	5	68	3-1/4	7	18	3	6100

Counterweight extends beyond arm one-half of the counterweight width, in capacities 25 ton and greater.

Other sizes available, consult factory.

Coil Lifters and Upenders



Model 82LA - Slit Coil C-Hook





PRODUCT FEATURES:

- Designed for heavy duty applications.
- Handles multiple slit coils which maximizes handling efficiency.
- Recessed counterweight minimizes interference with equipment or other obstacles.
- High tensile alloy steel plate reduces physical size and weight.
- Counter balanced to hang level when empty.
- Inside radius on hooks avoid coil edge contact.
- Curved coil saddle is standard.
- Guide handles for ease of hook positioning.
- Available with optional padding for additional coil protection.
- Complies with ASME standards.



WARNING

Center of the hoist and bail must be in-line with the load's center of gravity.

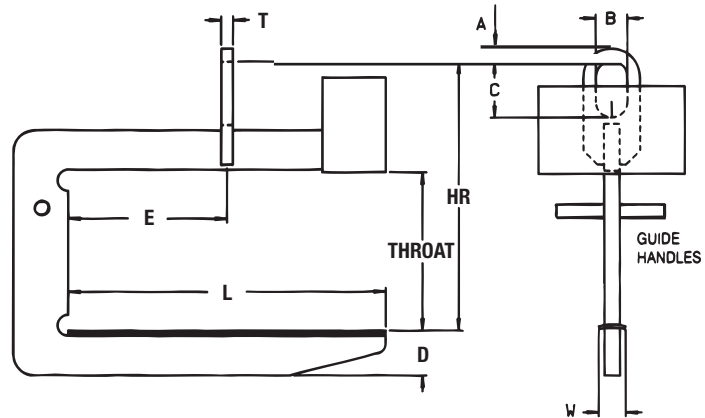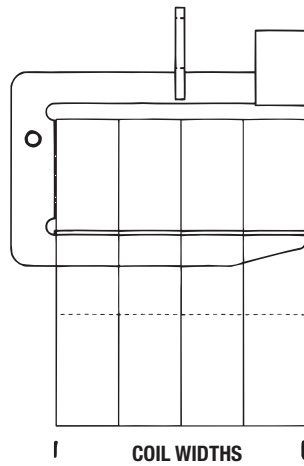

NOTE: E dimension is one half of "L" dimension.

SPECIFICATIONS

Model Number	Capacity (tons)	Dimensions (inches)										Weight (lbs.)
		Coil Width Max.	Throat	Lifting Arm				Bail Dimensions			Thk.	
				Length L	Depth D	Width W	HR Headroom	Opening				
A	B	C	T									
82LA-5-36	5	36	24	36	5-5/16	4	37-1/4	1-1/2	4	7	1-1/4	450
82LA-5-48		48	24	48	6-1/8	4	38	1-1/2	4	7	1-1/4	555
82LA-5-60		60	24	60	6-9/16	4	38-9/16	1-1/2	4	7	1-1/4	649
82LA-7 1/2-36	7-1/2	36	24	36	5-5/8	4	37-5/8	1-1/2	4	7	1-1/2	496
82LA-7 1/2-48		48	24	48	6-5/16	4	38-5/16	1-1/2	4	7	1-1/2	731
82LA-7 1/2-60		60	24	60	7-1/8	4	38-7/8	1-1/2	4	7	1-1/2	898
82LA-10-48	10	48	24	48	7-3/16	4	41-1/8	2	5	9	1-3/4	932
82LA-10-60		60	24	60	7-5/16	4	41-1/8	2	5	9	1-3/4	1281
82LA-10-72		72	24	72	7-1/4	4	41-1/8	2	5	9	1-3/4	1570
82LA-15-48	15	48	30	48	7-1/4	4	47-7/8	2	5	9	1-3/4	1510
82LA-15-60		60	30	60	8	4	48	2	5	9	1-3/4	1789
82LA-15-72		72	30	72	8-7/8	4	48-3/4	2	5	9	1-3/4	2120
82LA-20-60	20	60	30	60	9-1/8	4	52-1/8	2-3/4	6	12	2	2125
82LA-20-72		72	30	72	9-15/16	4	52-15/16	2-3/4	6	12	2	2485
82LA-25-60	25	60	34	60	9-1/8	4	57-3/4	3-1/4	6	14	2-1/2	2840
82LA-25-72		72	34	72	9-3/4	4	58-1/2	3-3/4	6	14	2-1/2	3350

Other sizes available, consult factory.